


Current sensor:
 Applied Standards: IEC61869-1, IEC61869-6, IEC61869-10, IEC61869-11
 Primary Current: 300A, Ext. 200%
 Secondary Output: 225mV
 Burden: $\geq 10k\Omega$
 Rated short time thermal current: 25kA, 1s
 Accuracy class: Cl. 1
 Protection class: 5P10

Voltage sensor:
 Voltage primary range: 10-22kV
 Secondary output: $3,25V/\sqrt{3}$
 Accuracy class: Cl. 3

Common specifications:
 Isolation voltage: 24/50/125kV
 Operating temperature range: -20°C to +70°C
 Storage temperature range: -40°C to +80°C
 Frequency: 60Hz

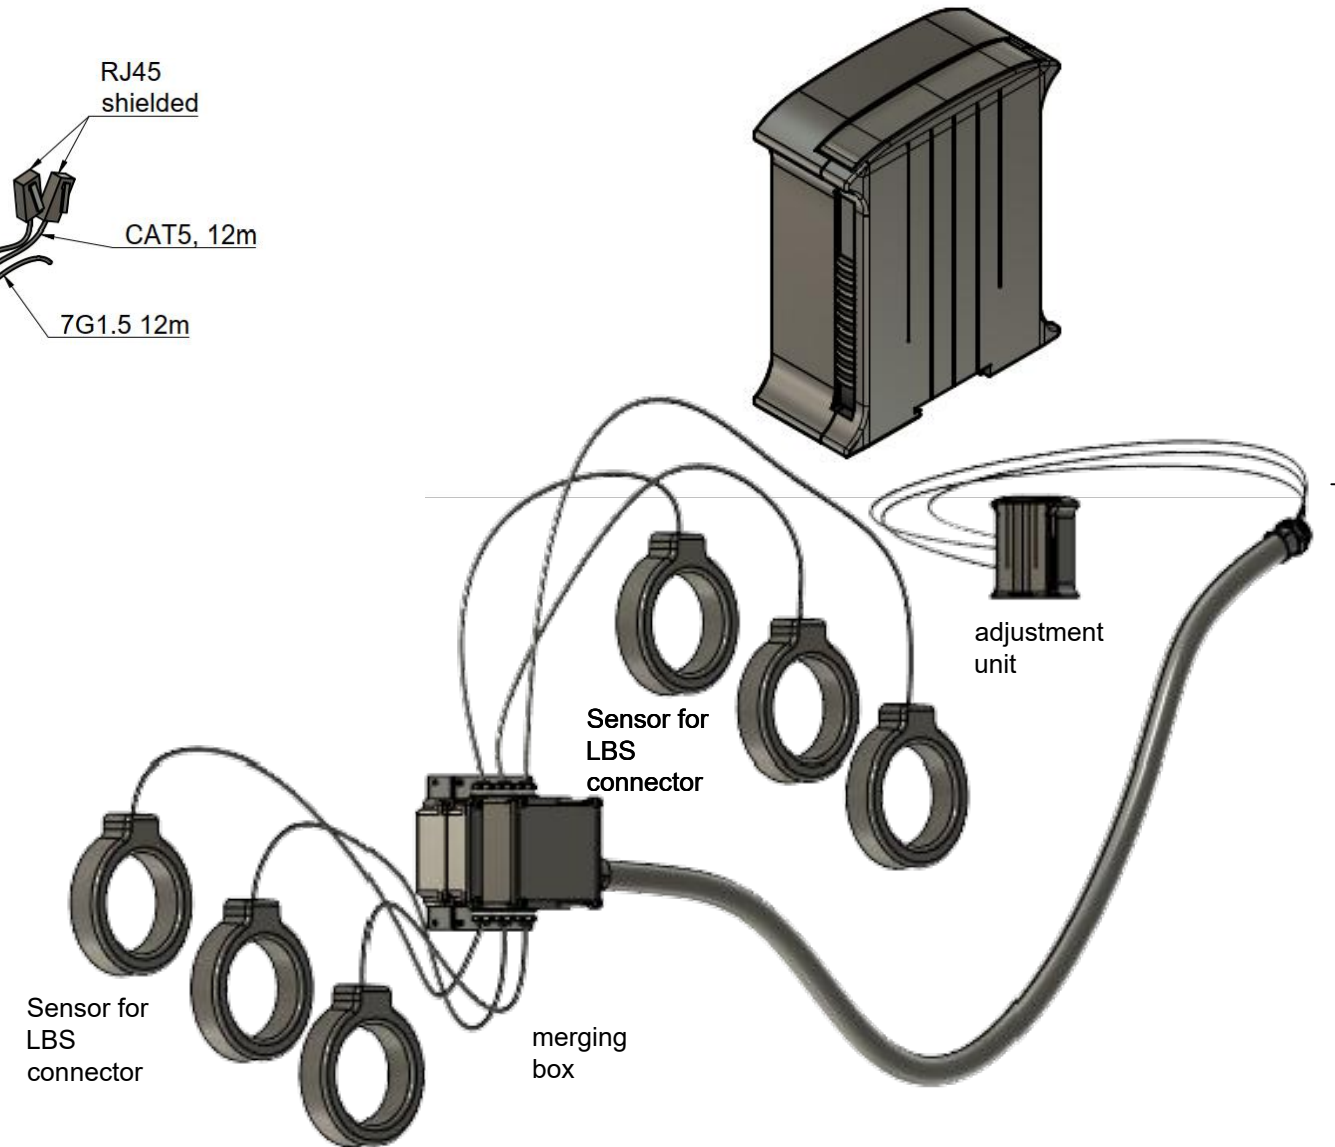

Dept. GWP	Technical reference 1201	Created by Martin Bakaracs 25.01.2023	Approved by Daniel Manninger 25.01.2023
	Document type Drawing	Document status released	
	Title C240F-17C	DWG No.	
	Rev. 0	Date of issue	Sheet 1/1