

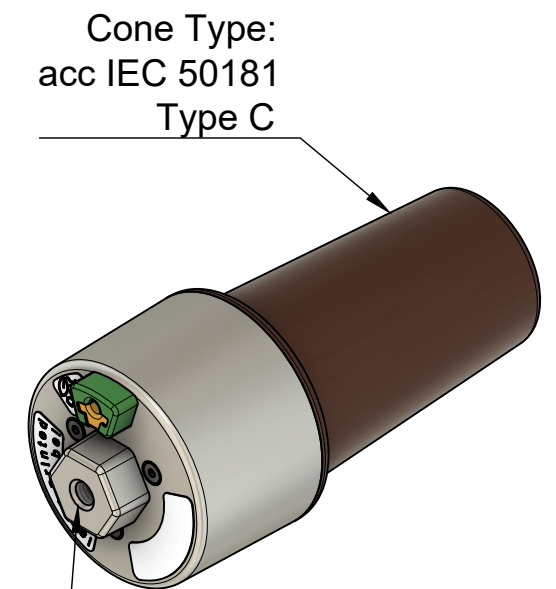
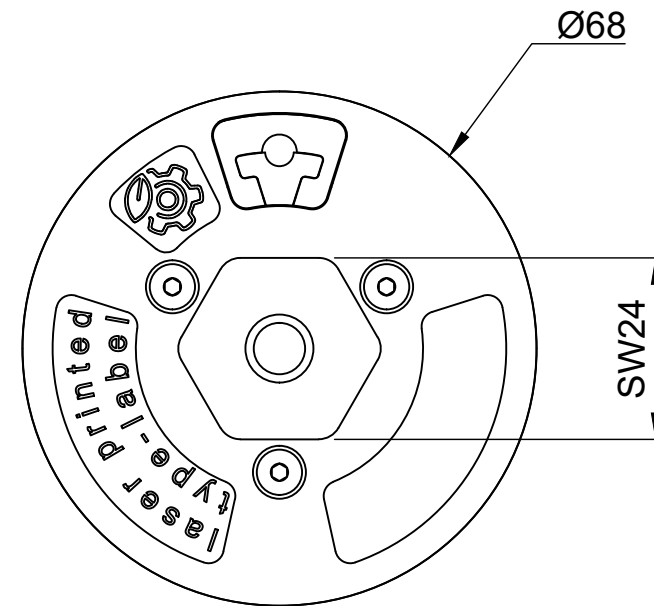
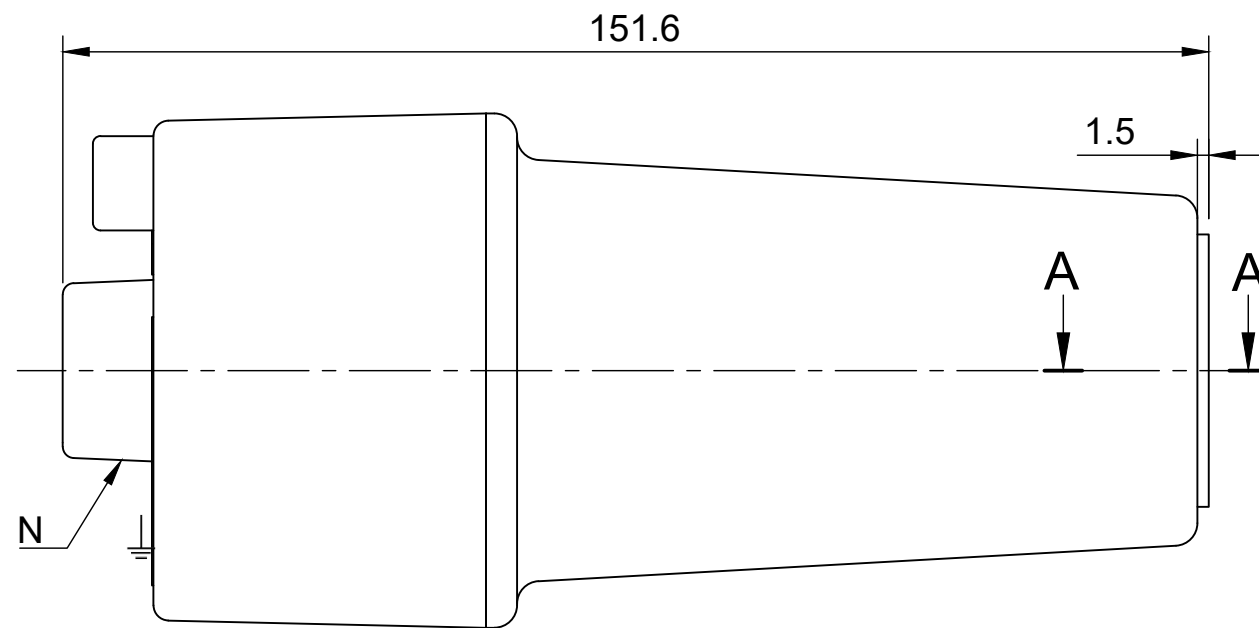
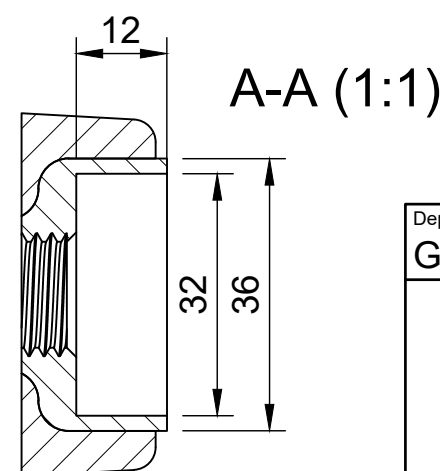
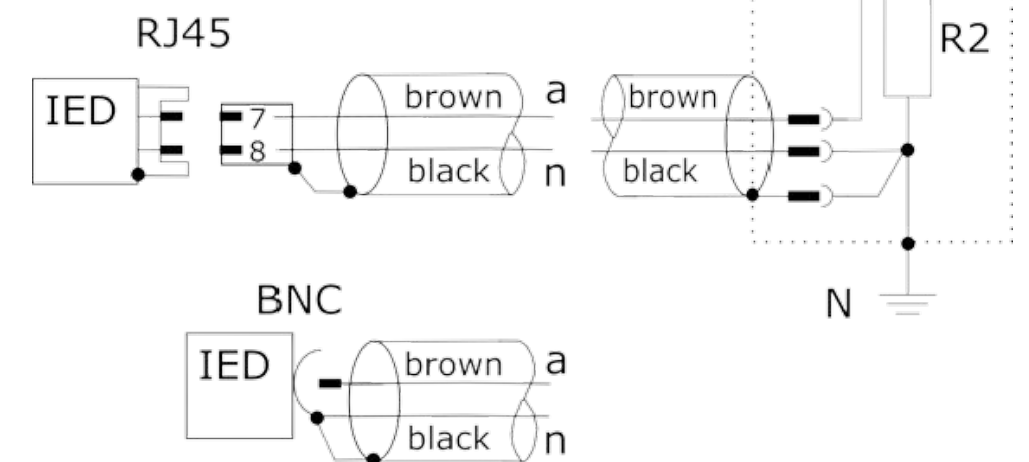


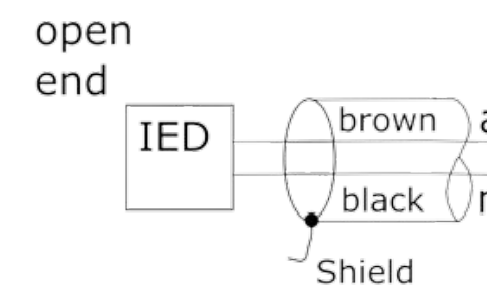

M8 ground terminal
hexabolt max 20Nm

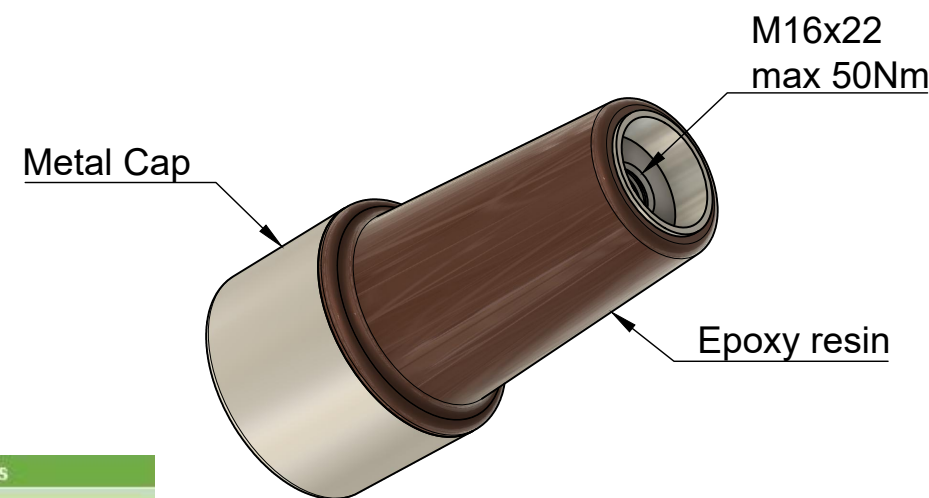

Manufacturer	Connection	Type	Accessories
Nexans	T-connector	M400TB/G, 440TB/G	
	Transformer adapter	KAA4	Adapter ring
	Surge arrestor	400PB-5SA, 400PB-10SA	
Südkabel	T-connector	SEHDT 33	
	Surge arrestor	MUT33 ¹	

Standard; IEC 61869-1, IEC 61869-6, IEC 61869-11

Insulation level; 36/70/170kV

Primary voltage; max. $33/\sqrt{3}$ kV

Secondary voltage; $3,25/\sqrt{3}$ V*

Frequency; 50/60Hz

Harmonics; Up to 150kHz on request


Burden; $200\text{k}\Omega // 350\text{pF}$ or $2\text{M}\Omega // 50\text{pF}$ *

Accuracy class 1; 0,2/0,5 and 3P/6P @-25°C to 70°C

Accuracy class 2; 1 and 3P/6P @-40°C to 80°C

Storage temperature range; -40°C to 80°C

*... or customer defined

Dept. GWP	Technical reference	Created by Martin Bakaracs 25.07.2023	Approved by Michael Waschek 25.07.2023	
 A3/1:1		Document type Drawing	Document status released	
		Title Indoor Voltagesensor C-Cone Type	DWG No. V360C-xx	
			Rev. 0	Sheet 1