

VOLTAGE SENSOR


V240JK universal data sheet

Indoor Voltage Sensor for T-Connector mounting

Shape Cellpack CTS 630 short cone

IEC 61869-1, IEC 61869-11

Type:	Voltage sensor
Primary type:	24 / 50 / 125 kV, 17.5 / 38 / 75 kV or 12 / 28 / 75 kV
Shape:	Cellpack CTS 630 short cone
Burden:	100kΩ - 2GΩ 0pF - 1nF
Accuracy:	0.2 / 0.5 / 1 with or without protection classes
Wide Band Accuracy:	WB0 - WB3 as additional classes, with accuracies of 0.2-3
Frequency:	50Hz or 60Hz or 50/60Hz
Primary value:	6kV/√3 - 22kV/√3
Secondary value:	1V - 10V
Voltage Factor/ Extension:	BIL and primary depended, usually 1.9 x Un/8h
Isolation-level:	24 / 50 / 125 kV, 17.5 / 38 / 75 kV or 12 / 28 / 75 kV
Cable length:	2m, 3.7m, 5m, 8m
Cable type:	2 pole, black, shielded, konf. 80°C (standard)
Connection type:	Open End or BNC or RJ45 (please name pinning)
Measuring burden:	100kΩ - 2GΩ 0pF - 1nF
Storage temperature:	-40°C - 85°C
Service temperature:	-25°C - +60°C (constant) / -40°C - 85°C (short-term)
Temperature error:	-1%@75°C/ +1%@-25°C/ -1,5%@85°C/ +1.5%@-40°C max.
TC (equivalent):	Maximal ±200PPM / Typical ±120PPM / Minimal ±50PPM PTC
Power rating/ consumption:	<1VA

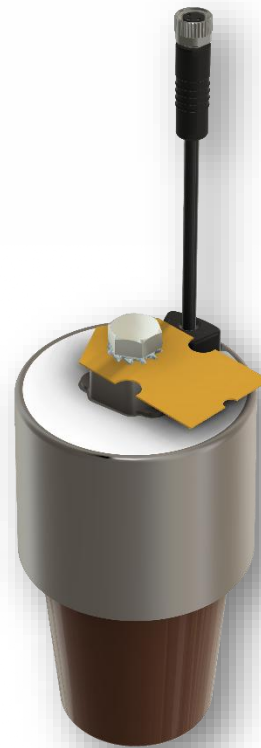

Describes the type of measuring product
 Primary product code value for fast identification: V240JK/ V175JK / V120JK
 Specified shape / dimensions - see universal technical drawing for details
 Rated burden of product - IEC standards: 200kΩ||350pF or 2MΩ||50pF

Accuracy class(es) according to specified standard (0.5 & 3P standard)
 Highly depends on burden of IED, cable (type and length), shape
 Applicable frequencies = grid/ base frequency, for other frequencies please ask
 Primary value @ line = primary (ratio), usually 20kV/√3, depends on region
 Secondary value @ IED = secondary (ratio), usually IEC Norm 3.25V/√3
 Upper measuring limit within accuracy class/ long-term measuring limit
 Isolation level according to specified IEC standard, identical to primary type (for LPVTs)
 Standard lengths of specific cable (other lengths available, but longer ordering time)
 Generic cable description, also co-axial, outdoor, low-cap, high-temp etc. available
 IED input interconnection, sensor side is always M8-3P-male
 Measuring burden @ testing bench, equals IED(s) input impedance
 Maximal storage temperature range, avoid extremes for longer than 72h
 Permitted constant and short-term ambience temperatures in operation
 Maximal deviations in percent at temperature extremes
 Corresponding temperature coefficient in parts per million (curve = quasi-linear)
 Power consumption @ nominal primary value

Additional Information:

Data Fields in green are customer-defined, and therefore vary with specific product
 Every specific product has a specific code
 All this specific data fields are also shown in the official offers and orders
 All data is locked to a specific no/ code, so if a value changes this code will change